

GAL COMBO



	M	CM	#	CM	L	#	#	HP	KG
GAL COMBO 3,0/20 SD	3,0	67	24/465	15	1300	20 x SD	-	118 (160)	2410
GAL COMBO 3,0/24 SD	3,0	67	24/465	12,5	1300	24 x SD	-	118 (160)	2410
GAL COMBO 3,0/20 DD	3,0	67	24/465	15	1300	-	20 x DD	118 (160)	2410
GAL COMBO 3,0/24 DD	3,0	67	24/465	12,5	1300	-	24 x DD	118 (160)	2410


STANDARD FEATURES

- Maintenance free disc hubs with 5-year warranty
- 24 notched discs (465mm diam)
- Rubber disc suspension non-stop system
- Hydraulic working depth adjustment
- Folding border discs
- Folding side screens
- Hydraulic fan drive
- Single-disc coulters (350mm) with press wheels (250mm) with spring harrow
- Coulters pressure adjustment for each single unit (up to 45kg/unit)
- Two (2) distribution heads (2) flow metering units for great accuracy
- Two easy adjustable variable cells distributors (feeler adjustment)
- 1300l hopper with inspection window
- X4 seeding controller with color touch screen
- Platform with folding stairs and a handrail
- Electric calibration unit with calibration kit

OPTIONAL EQUIPMENT

- Packer roller 600 mm
- Rubber roller 500 mm
- Disc roller 600 mm
- Double-disc coulters (350 mm) with press wheels (250 mm) with spring harrow
- Covering harrow
- Hydraulic row disc markers
- Automatic tramlines with electromechanical closing system 2+2 rows
- Automatic tramlines with electromechanical closing system 3+3 rows
- Electric sowing excluder
- ISOBUS conversion kit
- 7-Pin sensor cable

Seeding combination GAL COMBO

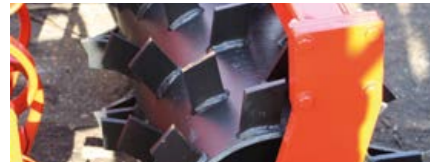

PACKER ROLLER D=600 MM

Recommended for medium and heavy soil. Exceptional crumbling and pressing action. Very aggressive, ideal for pre-sowing cultivation.




RUBBER ROLLER D=500 MM

Good for a reduced tillage operations. Great soil compression due to large pressing area.



DISC ROLLER D=600 MM

This roller is designed for heavy conditions. Due to heavy weight roller presses crop residues into the soil, and covers those with earth, while leveling the ground at the same time.

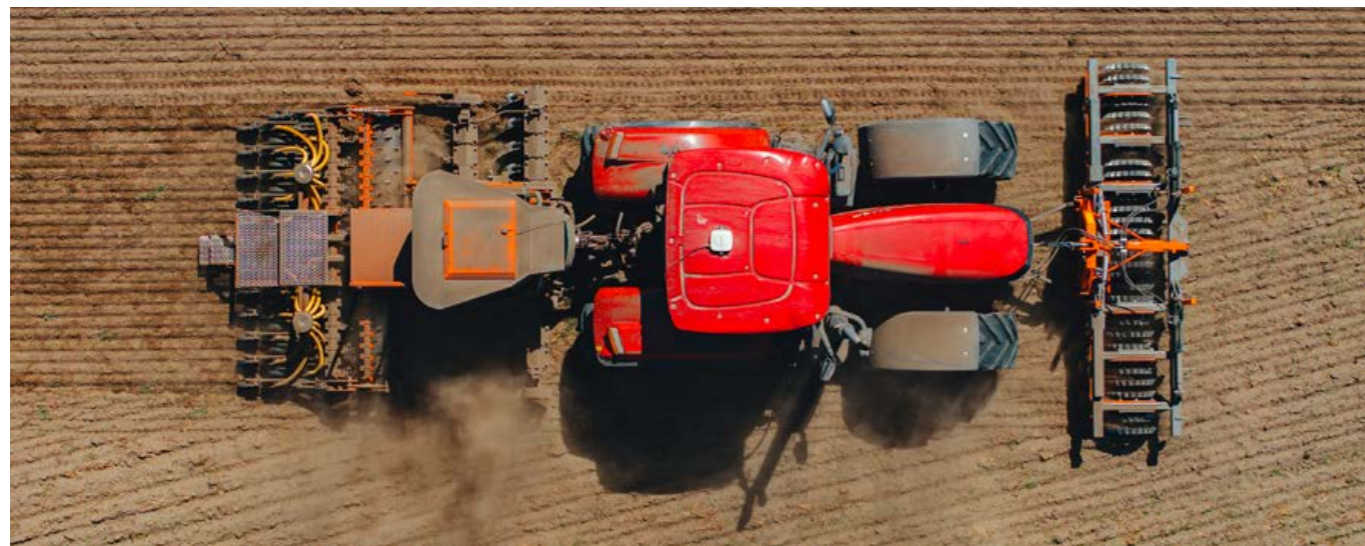

Seeding combination GAL Combo

We're offering a combination of the compact disc harrow and a pneumatic seed drill. Mandam made GAL-P 3,0m wide disc harrow is equipped with shortened hub assemblies and smaller 465mm diameter notched discs. Such a configuration provides a lower center of gravity. GAL-P comes with hydraulic depth adjustment (HRGP) and 5-year unlimited warranty hubs as standard. There are three rollers to choose from: Packer 600, Rubber 500 or Disc 600mm.

Pneumatic seed drill (Italian made) is designed for perfect integration with our disc harrow. Due to the low location of distribution heads and short feeding tubes this seeder has outstanding accuracy in seed delivery. Each coulters section has individually adjustable ground pressure up to 45 kg per unit (to compensate tractor tracks soil compression). There are 24 seeding units on 3m width @ 12,5cm spacing. Easy adjustable distribution units allow operation in a range from 1 to 300 kg/Ha (feeler adjustment). The manual section cut off system is standard, while the electromechanical tramline management is an option. Recommended operation speed of 11-14 km/h. Minimal oil flow of 40l/min with direct return is required.




mandam.com.pl/en/pneumatic-seeder-with-disc-harrow-gal-combo

Mandam Sp. z o.o.
Poland
44-100 Gliwice,
ul. Toruńska 14
0048 32 232 26 60
mandam.com.pl

[mandam.official](https://www.mandam.com.pl)



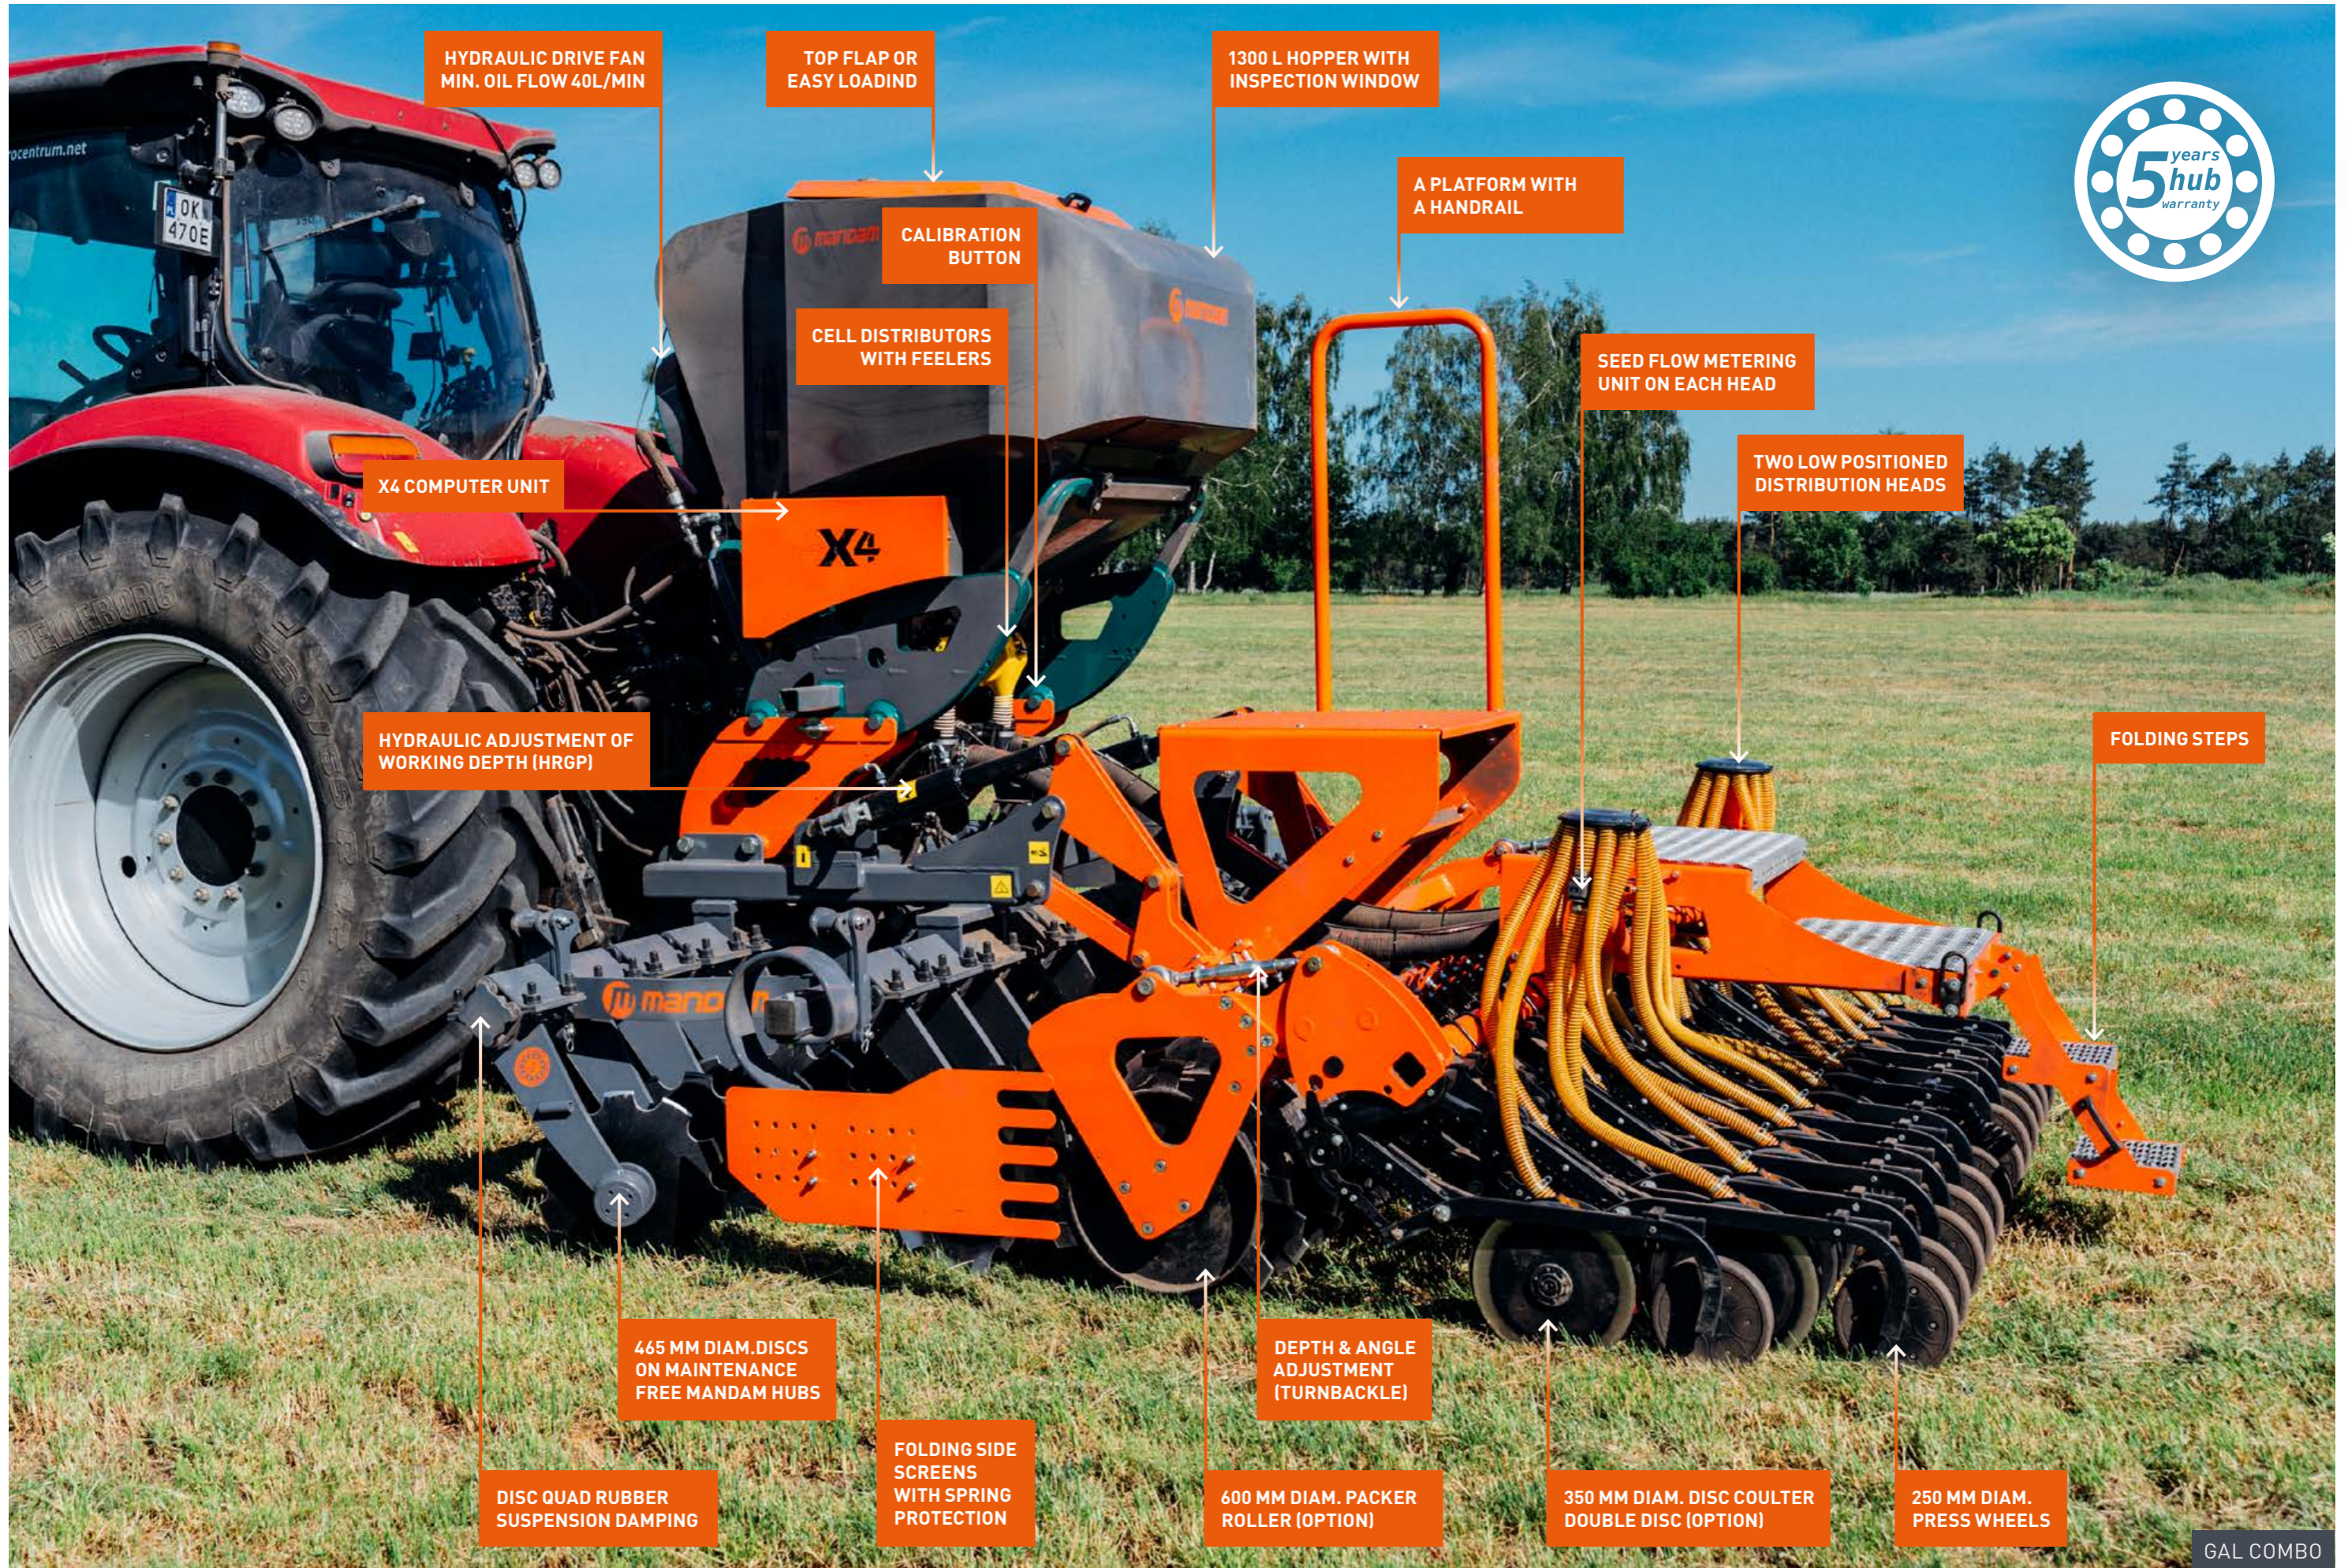

HYDRAULIC DRIVE FAN
MIN. OIL FLOW 40L/MIN

TOP FLAP OR
EASY LOADING

1300 L HOPPER WITH
INSPECTION WINDOW

CALIBRATION
BUTTON

A PLATFORM WITH
A HANDRAIL

CELL DISTRIBUTORS
WITH FEELERS

SEED FLOW METERING
UNIT ON EACH HEAD

X4 COMPUTER UNIT

TWO LOW POSITIONED
DISTRIBUTION HEADS

HYDRAULIC ADJUSTMENT OF
WORKING DEPTH (HRGP)

FOLDING STEPS

465 MM DIAM. DISCS
ON MAINTENANCE
FREE MANDAM HUBS

DEPTH & ANGLE
ADJUSTMENT
(TURNBACKLE)

DISC QUAD RUBBER
SUSPENSION DAMPING

FOLDING SIDE
SCREENS
WITH SPRING
PROTECTION

600 MM DIAM. PACKER
ROLLER (OPTION)

350 MM DIAM. DISC COULTER
DOUBLE DISC (OPTION)

250 MM DIAM.
PRESS WHEELS